


**DO NOT SCALE**

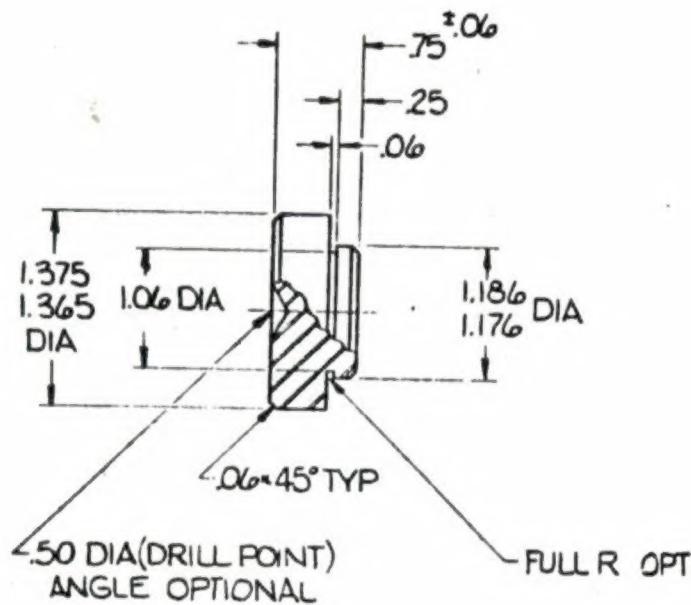

269A\9238  
KIT

## REVISIONS

REVISIONS					
SYM	E.O.'S	DESCRIPTION	DRWN	APP'D	DATE

NOTES:

1. IDENTIFY PER HP 8-5 (IMPRESSION STAMP)
2. BLACK OXIDE PER HP 4-50
3. ALL MACHINED SURFS <sup>125</sup> ✓

### 3. Proof

## SHOP COPY

REQD	PART NO.	REQD	PART NO.	NAME	SIZE	4130 STEEL	MIL-S-6758	2040 OPT
ASSEMBLY OPP.		ASSEMBLY SHOWN		LIST OF MATERIAL				SPECIFICATION
			UNLESS OTHERWISE SPECIFIED	DRWN	BENEFIELD	9-861		
			DIMENSIONAL TOLERANCES	CHK'D				
			3 PLACE DECIMAL $\pm .010$	APP'D				
			2 PLACE DECIMAL $\pm .03$	APP'D				
			ANGULAR $\pm 0^{\circ}30'$	APP'D				
			DIMENSIONS TO BE MET BEFORE PLATING.	APP'D				
			CORNER RADIUS .062 ON C' BORES AND SPOT FACES OF	APP'D				
			1.250 DIA. OR LESS — .093	APP'D				
			RADIUS ON GREATER THAN	APP'D				
			1.250 DIA.	APP'D				
NEXT ASSY	USED ON	NEXT ASSY	FINAL ASSY					
APPLICATION		QTY REQD		SCALE FULL				CODE 02731 SHEET 1 OF 1

## REDUCED SIZE PRINT